
FEATURES

- Low profile space
- Ideal for automated placement
- Glass passivated chip junctions
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering：
  260℃/10 seconds at terminals

VOLTAGE RANGE
50 to 1000 Volts
CURRENT
1.0 Ampere





MECHANICAL DATA

- **Case:** SOD-323 molded plastic body over glass passivated chip
- **Terminals:** Solder plated, solderable per JESD22-B102
- **Polarity:** Laser band denotes cathode end

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25℃ ambient temperature uniess otherwies specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Items	Symbol	1N4001W 1A	1N4002W 2A	1N4003W 3A	1N4004W 4A	1N4005W 5A	1N4006W 6A	1N4007W 7A	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current	$I_{F(AV)}$	1							A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	15							A
Thermal resistance from junction to lead(1)	$R_{\theta JL}$	35							℃/ W
Operating junction range	T_J	–55 to +150							℃
storage temperature range	T_{STG}	–55 to +150							℃

Note 1: Mounted on PCB with 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas.

Electrical Characteristics (T_A = 25 °C unless otherwise noted)

Items	Test conditions		Symbol	Min	Type	Max	UNIT
Instantaneous forward voltage	I_F=0.5A		V_F	-	0.92	-	V
	I_F=1A (2)				0.98	1.1	
Reverse current	V_R=V_{DC}	T_A=25℃	I_R	-	-	5	μA
		T_A=100℃				50	

Note 2: Pulse test:300μs pulse width,1% duty cycle.

RATING AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

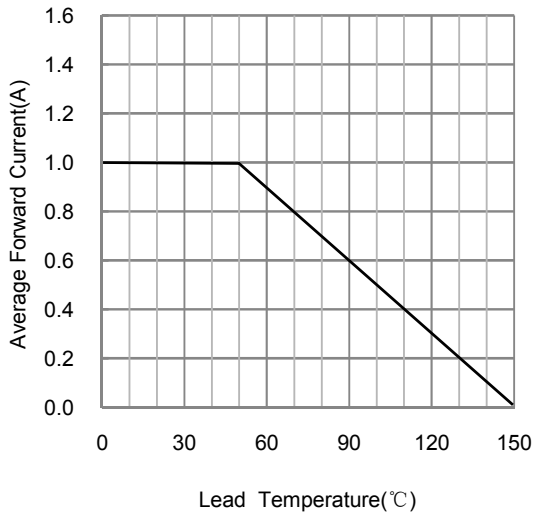


FIG.2-TYPICAL FORWARD CHARACTERISTICS

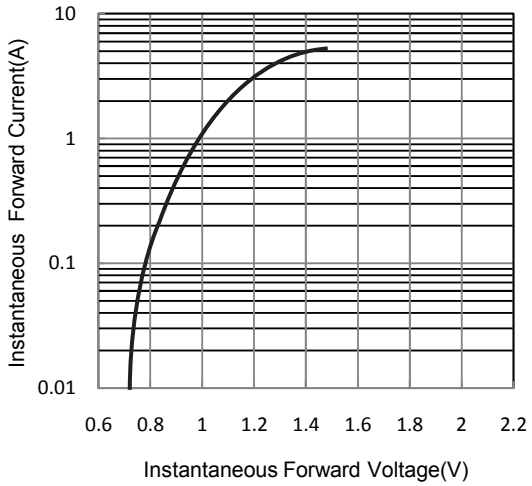


FIG.3 - TYPICAL REVERSE CHARACTERISTICS


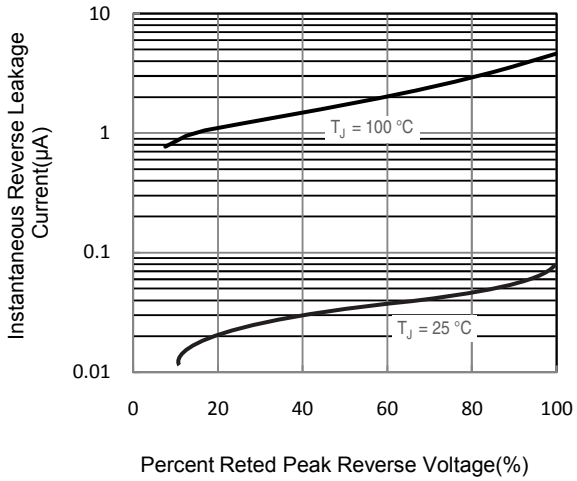



FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

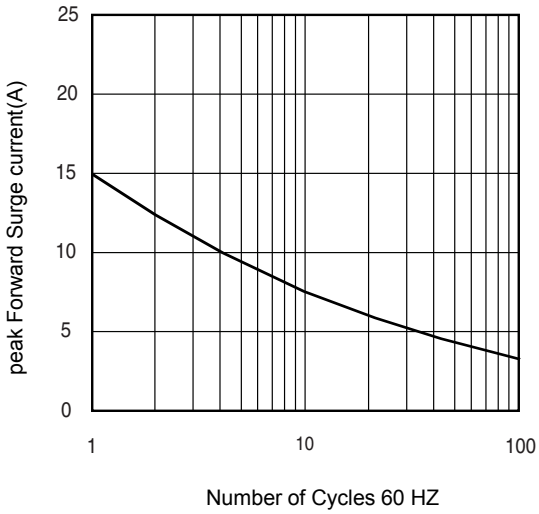

Soldering parameters


Reflow Condition		Pb-Free assembly (see as bellow)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150℃
	-Temperature Max($T_{s(max)}$)	+200℃
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3℃/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3℃/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217℃
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)℃
Time within 5℃ of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6℃/sec. Max
Time 25℃ to Peak Temp (T_P)		8 min. Max
Do not exceed		+260℃

FIG5: Reflow condition

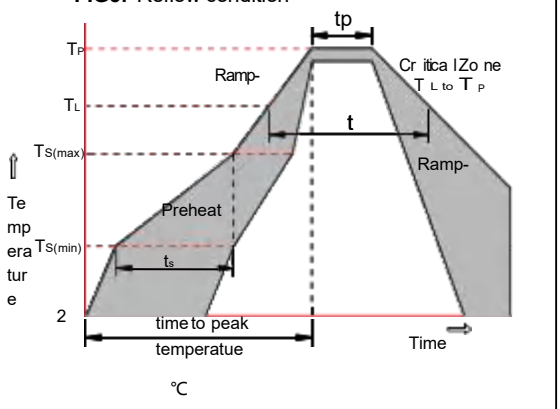


Package Dimensions & Suggested Pad Layout

SOD323

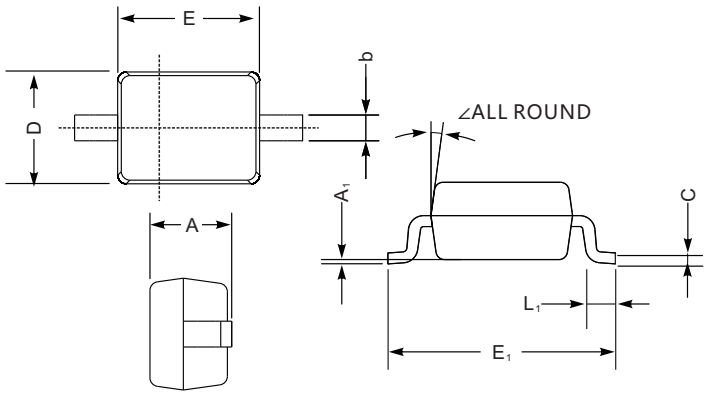

SOD-323 mechanical data


UNIT		A	C	D	E	E_1	b	L_1	A_1	∠
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	
	min	32	3.1	47	63	100	9.8	7.9	—	

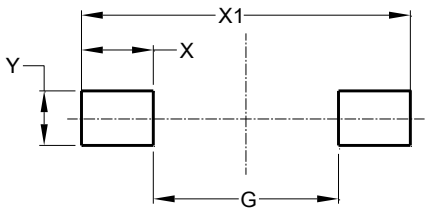

Dimensions	Value (in mm)
G	1.40
X	1.20
X1	3.80
Y	1.00


Tape & rell specification

Tape

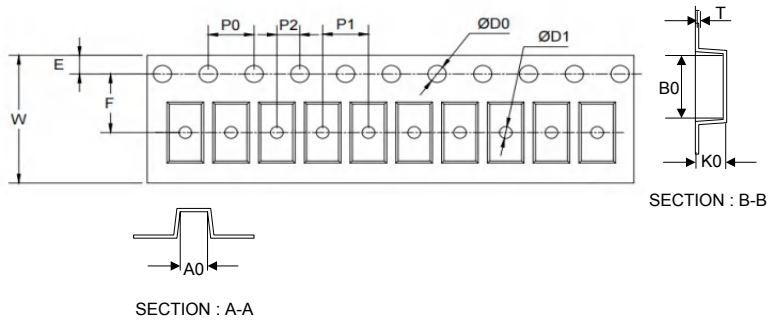

Symbol	Dimension (mm)
P0	4.00±0.20
P1	4.00±0.20
P2	2.00±0.20
D0	1.55±0.20
D1	1.00±0.20
E	1.55±0.25
F	3.60±0.20
W	8.00±0.20
A0	2.00±0.20
B0	3.25±0.20
K0	1.35±0.20
T	0.23±0.10

7” Reel

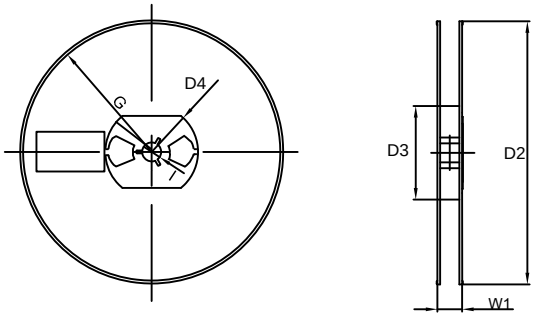

D2	177.0±5.0
D3	55Min.
D4	R24.6±2.0
G	R82.0±2.0
I	13.0±2.0
W1	10.20±3.0

Quantity: 3000PCS